

Your Global Automation Partner

TURCK

Pressure Sensors Industrial Pressure Measurement in Fluids and Gases



Pressure Sensors for Numerous Applications

Pressure is one of the factors that needs to be most frequently detected and monitored in the process - and manufacturing industry. Whether in standard applications or under special conditions, each application requires a perfect solution for its needs.

Therefore, high-quality materials, flexible process connections, easy programming as well as high accuracy and multiple display functions are the essential features of Turck pressure sensors.

Market-driven solutions

With a comprehensive standard portfolio of pressure sensors, Turck offers technically as well as economically attractive solutions for a wide range of pressure measuring tasks. In high-volume projects as well as in smaller quantities, you benefit of the highest quality at competitive prices.

Low storage costs

The underlying concept of the pressure sensor portfolio is to solve the diverse requirements with a minimum number of device types. This reduces the complexity of inventory and thus the cost of the handling and holding of various device variants.



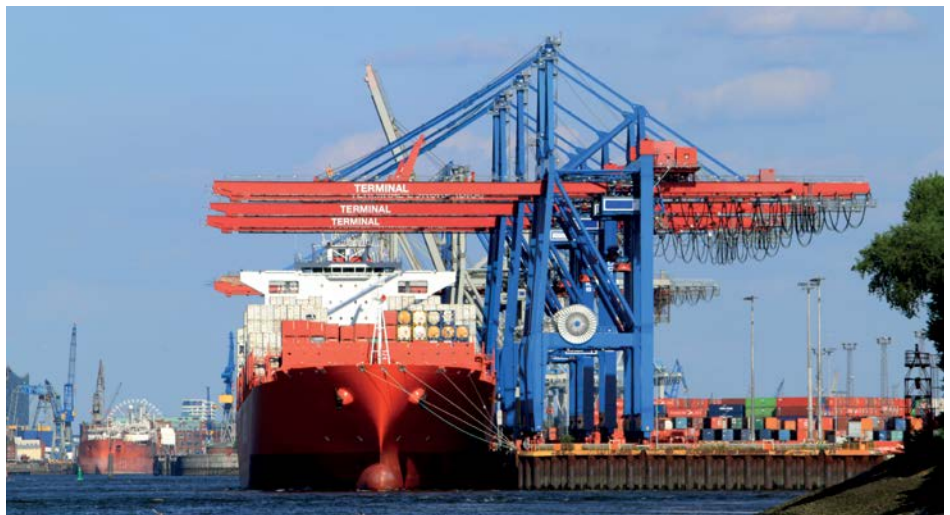
Reliable measurement technology

In the development of the electronics and the housing it was a major demand that harsh application conditions such as aggressive media or change of environmental conditions do not affect the accurate and reliable function of the sensors.



Certified quality

With several international approvals, the pressure sensors are versatile usable and a highly reliable and safe instrument for demanding pressure sensing in plant and machine construction.



Made-to-measure solution

With the Turck product portfolio, you solve an enormous variety of pressure measuring tasks in the most diverse applications. With regards to customer-specific requirements not covered by the standard, we develop the optimum solutions for you in technical and economic terms.



PS Series

The robust all-rounder



IO-Link c



- -1...600 bar relative pressure
- Accuracy 0.5 % f.s.
- 0...16 bar absolute pressure
- Very high overload capacity
- Fully potted IP69K
- Stainless steel housing 1.4305 (AISI 303) or 1.4404 (316 L)
- Rotatable sensor body
- IO-Link
- ATEX certified

If high chemical resistance, durability and reliability are required, the PS series is optimally suited. Especially designed to function reliably in the harshest environments, neither dust, water, aggressive oils or alkalis can affect the operation of the PS sensors. Short delivery times, variable process connections and a wide range of output types make the PS sensors reliable all-rounders.



PS 010V - 3 01 - LI2UPN 8 X - H1 1 4 1 / 3GD

PS 010V Pressure sensor - 3 01 Type/Pressure connection - LI2UPN 8 X Electrical version -

Measuring range

- 01VR -1...0 bar g ¹⁾
- 001R 0...1 bar g ¹⁾
- 0.25VR -0.25...0.25 bar g
- 001A 0...1 bar a
- 003A 0...2.5 bar a
- 010A 0...10 bar a
- 016A 0...16 bar a
- 001V -1...1 bar g ¹⁾
- 003V -1...2.5 bar g ¹⁾
- 010V -1...10 bar g
- 016V -1...16 bar g
- 025V -1...25 bar g
- 040V -1...40 bar g
- 100R 1...100 bar g
- 250R 1...250 bar g
- 400R 1...400 bar g
- 600R 1...600 bar g ²⁾

Functional principle

PS Pressure sensor

Pressure connection

- 01 G $\frac{1}{4}$ " female thread
- 02 $\frac{1}{4}$ "-18NPT female thread
- 03 $\frac{1}{4}$ "-18NPT male thread
- 04 G $\frac{1}{4}$ " male thread
- 05 $\frac{7}{16}$ " UNF male thread (only for design 5)
- 06 G $\frac{3}{4}$ " male thread front-flush (only for design 6)
- 07 1 $\frac{1}{2}$ " Tri-Clamp (only for design 6)
- 08 G $\frac{1}{2}$ " male thread manometer connection (only for design 5)
- 09 G $\frac{1}{2}$ " male thread front-flush (only for design 6)
- 10 R $\frac{1}{4}$ " male thread
- 11 R $\frac{1}{4}$ " female thread

Design



- 3 adjustable, with display, non-rotatable sensor body
- 5 adjustable, with display, rotatable sensor body
- 6 adjustable, with display, rotatable sensor body, with front-flush membrane

with LED indicator

Operating voltage
8 15 (18)...30 VDC

Output type

- 2UPN 2 switching outputs/IO-Link
- LI2UPN current or voltage and switching output/IO-Link



1) not available for PS...609

2) not available for design 6

H1 1 4 1 Electrical connection / 3GD Special type

Assignment

- 1 standard assignment

Number of contacts

- 4 4-pin

Connector type

- 1 straight

Connector type

- H1 receptacle, M12 x 1

Special type

- 3GD Ex zone

PC Series

The smart IO-Link pressure transmitter



- -1...600 bar relative pressure
- Ceramic measuring cell with switchpoint accuracy 0.5 % f.s.
- IO-Link
- Full stainless steel housing 1.4305
- Protection class IP69K
- Compact and rugged design
- Excellent EMC properties
- 2 switching outputs or communication via IO-Link


With its compact, display-less design in a full stainless steel housing, the sensors of the PC series are particularly resilient. For the smart connection of the PC series IO-Link is available as output signal. IO-Link simplifies the exchange of information, as well as parameterization and thus reduces the operation and maintenance effort considerably. In addition to IO-Link there are also switching outputs available.



PC 250R - 2 01 - 2UPN 8 X - H1 1 4 1

PC	250R	Functional principle	-	2	01	Mechanical version	-	2UPN	8	X	Electrical version	-
		Measuring range 01VR -1...0 bar g 001R 0...1 bar g 001V -1...1 bar g 003V -1...2.5 bar g 010V -1...10 bar g 016V -1...16 bar g 025V -1...25 bar g 040V -1...40 bar g 100R 1...100 bar g 250R 1...250 bar g 400R 1...400 bar g 600R 1...600 bar g				Pressure connection 01 G1/4" female thread 02 1/4"-18 NPT female thread 03 1/4"-18 NPT male thread 04 G1/4" male thread 10 R1/4" male thread 11 R1/4" female thread					Electrical version X with LED indicator Operating voltage 8 15...30 VDC Output type 2UPN 2 switching outputs	
		Functional principle PC Pressure switch				Design 2 cylinder without display						

H1	1	4	1	Electrical connection
				Assignment 1 standard assignment
				Number of contacts 4 4-pin
				Connector type 1 straight
				Connector type H1 receptacle, M12 x 1



PT-2 Series

The front-flush type for viscous media



- -1...400 bar relative pressure
- Accuracy 0.5 % f.s.
- Stainless steel 1.4435 (AISI 1.4542)
- Protection class IP67
- Fully welded construction
- Excellent EMC properties
- -40...+85 °C media temperature
- 4...20 mA

The sensors of the PT-2 series are particularly suitable for highly viscous, fibrous or crystallization-prone fluids. The front-flush design prevents dead spaces where deposits can adhere. This makes the devices especially suitable for adhesive application. Thanks to the fully welded housing the PT-2 sensors measure reliably, even under very harsh application conditions.



PT 010R - 2 6 - LI3 - H1 1 4 1

PT 010R Functional principle - 2 6 Mechanical version - LI3 Electrical version -

Measuring range

010R 0...10 bar g
016R 0...16 bar g
025R 0...25 bar g
040R 0...40 bar g
060R 0...60 bar g
100R 0...100 bar g
160R 0...160 bar g
250R 0...250 bar g
400R 0...400 bar g

Functional principle

PT Pressure transmitter

Pressure connection



6 G $\frac{3}{4}$ " male thread, front-flush
9 G $\frac{1}{2}$ " male thread, front-flush

Design

2 front-flush membrane, cylinder without display

Electrical version

LI2 4...20 mA 3-wire
LI3 4...20 mA 2-wire



H1 1 4 1 Electrical connection

Assignment

1 standard assignment

Number of contacts

4 4-pin

Connector type


1 straight

Connector type

H1 receptacle, M12 x 1

PK-N/PK-P Series

The specialist for pick-and-place applications



- -1...12 bar relative pressure
- Accuracy 0.2 % f.s.
- NC/NO programmable switchpoints
- 2 switching outputs (PNP) or 1 switching output and IO-Link
- Protection class IP65
- Shock and vibration proof
- Nano lightweight design
- Response time < 2.5 ms (200 Hz)
- Programmable keylock
- Suitable for dry/oiled air and inert gases

The PK series has been developed specifically for the requirements in pneumatic applications. Compact, precise and lightly built, the sensors are suited for versatile use in the field of handling and automation systems. The sensors feature two switching outputs, which can be programmed in the hysteresis function as openers or closers



PK-N





PK-P

PK 01VR - N 12 AL - 2UP 8 X - V1 1 4 1


PK	01VR	Functional principle	-	N	12	AL	Mechanical version	-	2UP	8	X	Electrical version	-
		Measuring range 01VR -1...0 bar g 01V -1...1 bar g 010R 0...10 bar g 10V -1...10 bar g 012R 0...12 bar g Functional principle PK Pressure sensor, compact					Housing material blank Plastic (Design P) AL Aluminium (Design N) Pressure connection 12 G$\frac{1}{8}$" female thread 13 G$\frac{1}{8}$" male thread 14 NPT$\frac{1}{8}$" male thread Design N Cylinder, axial display P Cylinder, radial display				Indication X... LED display Voltage range 8 15 (18)...30 VDC Output type 2UP 2 switching outputs PNP 2UPN 2 switching outputs/ IO-Link		

V1 1 4 1	Electrical connection
	Assignment 1 standard assignment Number of contacts 4 4-pin Connector type 1 straight Connector type V1 receptacle, M8*



*M12 x 1 optional

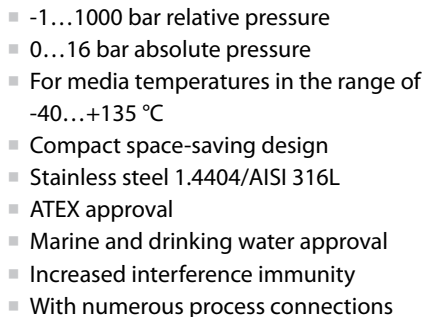For the most demanding applications in machine construction



Maximum resistance to vibration, continuous shocks and permanent pressure and temperature changes - even in aggressive media - make the pressure transmitters a reliable equipment for your plant safety and process control.

Hans Turck GmbH & Co. KG | 45466 Mülheim an der Ruhr, Germany | T +49 208 4952-0 | F +49 208 4952-264 | more@turck.com | www.turck.com

PT1000



PT2000



I2	Output type	-	H1143	Electrical connections	/	D830	Special type
	Output type			Electrical connections			Standard
	Current output			M12 x 1 connector			O For oxygen applications
I2	4...20 mA, 7.0...33.0 VDC, 2-wire ⁽⁶⁾		H1143	M12 x 1 ⁽⁶⁾ 2L IN=1 OUT=3 3L IN=1 OUT=4 GND=3		D830	With EPDM seal
I4	4...20 mA, 7.0...33.0 VDC, 2-wire increased interference immunity		H1144	M12 x 1 ^{(4) (6)} 2L IN=1 OUT=4, 3L IN=1 OUT=3 GND=4		W	Drinking water approval
IX	4...20 mA, 10.0...30.0 VDC, 2-wire ATEX ⁽⁷⁾		H1141	M12 x 1 ⁽⁶⁾ 2L IN=1 OUT=2 3L IN=1 OUT=2 GND=3		X	Pressure peak protection
	Voltage output			DIN EN 175301-803 connector			
U1	0...10 V, 12...33 VDC, 3-wire ⁽⁶⁾		DA91	Design A ⁽⁶⁾ 2L IN=1 OUT=2 3L IN=1 OUT=2 GND=3			
U2	1...6 V, 8.0...33.0 VDC, 3-wire		DC91	Design C 2L IN=1 OUT=2 3L IN=1 OUT=2 GND=3			
U3	0...5 V, 7.0...33.0 VDC, 3-wire		DC92	Design C 2L IN=3 OUT=1 3L IN=3 OUT=2 GND=1			
UA	0...10 V, 24 VAC ± 15 %/12...33 VDC ⁽²⁾ , 3-wire ⁽³⁾		DC95	Design C 2L IN=1 OUT=2 3L IN=1 OUT=3 GND=2			
U6	ratiometric 10...90 %, 4.5...5.5 VDC, 3-wire			Cable with quick connect			
UX	ratiometric 10...90 %, 4.5...5.5 VDC, 3-wire ⁽⁷⁾		CM2.0	2.0 m ⁽⁵⁾ IN=brown OUT=green IN=brown OUT=green GND=white			
			TC11	PG connection Cable gland quick connect, PG9 ⁽⁵⁾ IN=1, OUT=2, GND=3			
			MP1	Metri Pack Metri Pack 150 2L IN=B, A=OUT, 3L IN=B, Out C, GND=A			
			RA15	Rast connector 2.5 IN=1, GND=2, OUT=3			
			WM0.5	Wire connection 2 L IN=red, OUT blue 3 L IN=red, OUT blue, black GND			
				Notes			
				⁽¹⁾ Pressure range [-1...60 bar], [-30...750 psig]			
				⁽²⁾ Pressure range [-1...1000 barg], [-30...14500 psig]			
				⁽³⁾ 24 VAC variant not with M12 x 1, RAST, connector and wire connection			
				⁽⁴⁾ No ratiometric output, No AC supply			
				⁽⁵⁾ As an accessory with DT04-3P or 4P connector possible			
				⁽⁶⁾ Preferred types			
				⁽⁷⁾ only with H1143 and DA91			







Accessories






Connection and function accessories

Product-specific installation accessories ensure maximum degrees of freedom in the application. We offer accessories for operating, mounting and protection of the pressure sensors.

Available are, among other things, mounting accessories for easy and safe mounting of the PK sensor series as well as accessories, which safely protect the PS sensor series against mechanical destruction.

With a cooling section for the PS and PT sensors, high media temperatures can be reduced, so that the pressure detection even at temperatures over 200 °C is possible.

PTS-MB	PCS-G1/4A4	PTS Cover	PK-N-MZ-001	PK-P-MZ-001
				
Fixing clamp	Cooling section	Closure cap for PS series	PK-N mounting kit	PK-P mounting kit
				

RKC4.4T-2/TEL	PCV-G1/8A4	PCV-G1/4A4	PCV-G1/2A4	PCV-N1/4A4
				
Cables	Threaded nipple G1/8" on G1/4"	Threaded nipple G1/4" on G1/4"	Threaded nipple G1/2" on G1/4"	Threaded nipple N1/4" on G1/4"
				

Fluid Sensors Portfolio

Sensors for pressure, flow, temperature, level control and capacitive position sensing

In addition to pressure sensors, Turck offers an extensive portfolio of sensors for the monitoring of flow velocity, filling level as well as temperature and capacitive position sensing.

Flow sensors/Flow meters

The failure of flow leads, often and inevitably, in almost all applications of production and process technology to significant impairments and outages. The monitoring of the flow plays an essential role. Turck offers different flow monitoring systems from universal to the special use.



Temperature measurement

To operate machines and equipment safely and efficiently, the temperature must be controlled continuously as a critical parameter in many industrial processes. Combined with numerous connection options and variable output signals, the Turck temperature sensor portfolio guarantees maximum flexibility in temperature measurement.



Level control

For level detection in liquids or solids, Turck offers special level sensors that detect levels according to the capacitive measuring principle or continuously monitor the filling level. Like all fluid sensors from Turck, the level sensors are also very robust, reliable and resistant to aggressive operating conditions.



TURCK

28 subsidiaries and over
60 representations worldwide!

D101929 | 2016/08



www.turck.com